

Model: GPC1000D5 | GPC1000S5

Powered by CUMMINS



Generator Specification

Service	PRP(1)	ESP(2)
Power (KVA)	1000	1100
Power (KW)	800	880
Rated speed	1500RPM	
Standard voltage	400/230V	
Power factor	0.8	
Phase	3	

Performance Data		
Model	GPC1000D5 S5	
Engine brand	CUMMINS	
Engine model	KTA38-G5	
Speed control type	Electronic	
Alternator brand	LEORY SOMER	
Alternator model	TAL-A49-E	
Control system	DEEPSEA DSE7320	
Starter motor voltage	24V	
Frequency	50Hz	
Fuel Consumption (L/H)	100% Prime Load	209
	75% Prime Load	161
	50% Prime Load	113
	25% Prime Load	58



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1:2008, EN 12601: 2010
- **GPC1000D5: OPEN TYPE; GPC1000S5: CONTAINERIZED TYPE**

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)


According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage (V)	ESP		PRP		Current Amps
	KVA	KW	KVA	KW	
415/240	1100	880	1000	800	1392
400/230	1100	880	1000	800	1444
380/220	1100	880	1000	800	1520

Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

Dimension & Weight

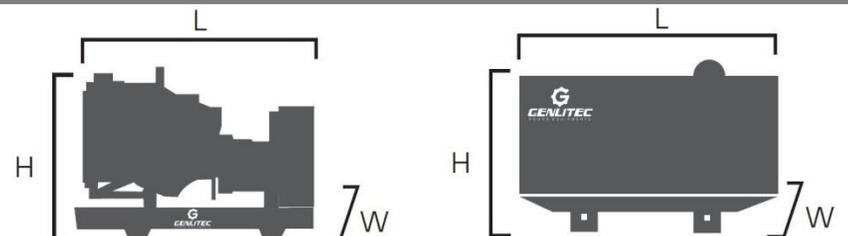

Dimension	Open type	Silent type 20GP Container
Length (L)	4500mm	6058mm
Width (W)	2060mm	2438mm
Height (H)	2165mm	2591mm
Net Weight	7550kg	13000kg


Note: This parameters allows for some acceptable deviations.

■ **Engine Specification**



MODEL: CUMMINS KTA38-G5	
Cylinder number	V - 12
Aspiration system	Turbo, Water/Air Cooling
Cooling method	Water cooled
Governor type	Electronic
Bore x Stroke (mm)	159x159
Compression ratio	13.9:1
Rated speed (RPM)	1500
Displacement (L)	37.8
Rated power (KW)	880
Standby power (KW)	970
Oil consumption (g/kw.h)	≤4
Coolant capacity (L)	258
Oil pan capacity (L)	135
Fuel system	CUMMINS PT pump
Starter motor capacity	DC 24V

■ **Alternator Specification**

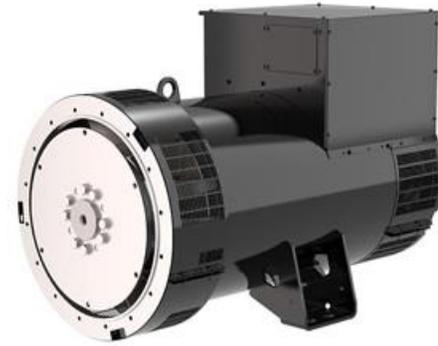

MODEL: LEROY SOMER TAL-A49-E	
Number of phase	3
Rated power (KW/KVA)	800/1000
Frequency (Hz)	50
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	12
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

Standard Supply Scope

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator
- A.V.R
- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Float Battery charger
- Manual books
- Tool kits
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker

■ **Optional Supply Scope**

Engine	Alternator	Generator Sets	Control Panel
○ Water jacket pre-heater	○ Anti-condensation heater	○ Extended fuel tank 12h/24h/72h	○ Remote control system
○ Lubrication oil pre-heater	○ PMG	○ Soundproof canopy	○ Build-in/External ATS
○ Battery isolator	○ STAMFORD alternator	○ Trailer mounted	○ Synchronizing System
	○ GENLITEC alternator	○ 20GP containerized canopy	○ Power output sockets

■ Control Panel

Configuration

- Emergency stop button
- Protection MCB (Main circuit breaker)
- Float battery charger
- ATS connection
- AMF digital control module
- Fuel level meter
- Controller power switch
- Alarm buzzer

Features

- Chinese, English, Spanish, Turkish, Russian & French
- Three phase generator monitoring
- Automatic or manual start/stop of the gensets
- Push buttons for simple control & operation
- Generator measurements (50Hz/60Hz)
- Precision collect & display parameters about ENGINE
- Comprehensive shutdown or warning on fault condition
- Three phase generator protections
 - Over / under voltage
 - Over / under frequency
 - Current / voltage asymmetry
 - Over current / overload
- Three phase AMF function
 - Over / under voltage
 - Loss of phase detection function
- Emergency start function
- IP55 waterproof with rubber-ring gasket



Control Module Model: DEEPSEA DSE7320

Display	LCD
Operation panel	Silicon rubber
Digital input	5
Relay output	6
Analogue input	3
AMF	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator voltage	15-360V (ph-N)
Alternator frequency	50/60Hz
KW/Amp Detecting & Display	Yes
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-25 ~ +70°C

■ Controller Module Options

COMAP	DEEPSEA	SMARTGEN
AMF25	DSE6020	HGM6120N
		

GENLITEC POWER TECHNOLOGY CO., LTD.
 GENLITEC (FUZHOU) POWER EQUIPMET CO., LTD.
 marketing@genlitech.com | www.genlitech.com

All information in the document is substantially correct at the time of printing
 But may be subsequently altered by the company.