

GPK13S5 | GPK13D5

Powered by 

Genlitemc[®]
Power & Lighting Solutions



■ Generator Specification

Service	PRP ⁽¹⁾	ESP ⁽²⁾
Power (KVA)	13	14.3
Power (KW)	10.4	11.4
Rated speed	1500RPM	
Standard voltage	230/400V	
Power factor	0.8	
Phase	Three	



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 006/42/EC Machinery directive
- 2014/30/EU Electromagnetic compatibility directive
- EN 12100:2010; EN ISO 8528-13:2016; EN 60204-1:2018; EN 61000-6-2:2019; EN 61000-6-4:2019
- **GPK13S5 (Canopied Type)**
- **GPK13D5 (Open Type)**

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)

According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set can deliver for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage (V)	ESP		PRP		Current Amps
	KVA	KW	KVA	KW	
240/415	14.3	11.4	13	10.4	18.1
230/400	14.3	11.4	13	10.4	18.8
220/380	14.3	11.4	13	10.4	19.8


Performance Data

Model		GPK13S5 GPK13D5
Engine brand		KUBOTA
Engine model		D1703-E2BG
Speed control type		Mechanical
Alternator brand		GENLITEC
Alternator model		S164G10.8
Control system		SMARTGEN HGM420N
Starter motor voltage		12V
Frequency		50Hz
Fuel Consumption (L/H)	100% Prime Load	3.5
	75% Prime Load	2.8
	50% Prime Load	1.75
	25% Prime Load	/
Fuel Tank (L)		50

Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

Dimension & Weight

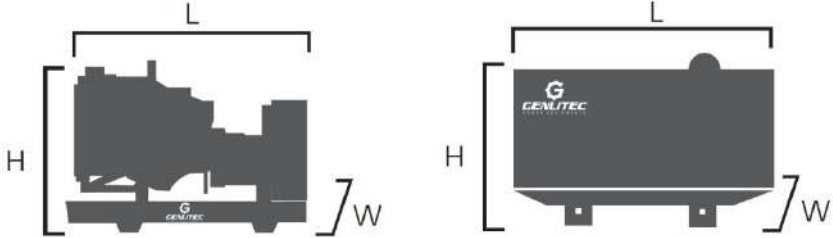

Dimension	Open type	Silent type
Length (L)	1450mm	2000mm
Width (W)	720mm	850mm
Height (H)	900mm	1150mm
Net Weight	550kg	700kg

Note: This parameter allows for some acceptable deviations.

GPK13S5 | GPK13D5

Powered by 

Genlitemc[®]
Power & Lighting Solutions

■ Engine Specification



MODEL: KUBOTA D1703-E2BG	
Cylinder number	4
Aspiration system	Natural
Cooling method	Water cooled
Governor type	Mechanical
Bore x Stroke (mm)	87 x 92.4
Compression ratio	23:1
Rated speed (RPM)	1500
Displacement (L)	1.647
Rated power (KW)	12.8
Standby power (KW)	15.1
Injection pump	Bosch Type
Combustion system	E-TVCS
Oil capacity (L)	7.6
Charger alternator capacity	12V, 1.4KW
Starter motor capacity	DC 12V

■ Alternator Specification



MODEL: GENLITEMC S164G10.8	
Number of phase	Three
Rated power (KW/KVA)	10.8/13.5
Frequency (Hz)	50
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	6/12
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

Standard Supply Scope

- | | | | |
|-------------------------------|----------------------------|-------------------------|-------------------------|
| ● Industrial exhaust silencer | ● Flexible pipes | ● Float Battery charger | ● Base frame |
| ● Maintenance free battery | ● Battery wires | ● Manual books | ● Digital control panel |
| ● Water cooling radiator | ● Wiring diagram | ● Tool kits | ● Main circuit breaker |
| ● A.V.R | ● Build-in based fuel tank | ● Emergency stop button | |

■ Optional Supply Scope

Engine	Alternator	Generator Sets	Control Panel
☐ Water jacket pre-heater	☐ Anti-condensation heater	☐ Extended fuel tank 12h/24h/72h	☐ Remote control system
☐ Lubrication oil pre-heater	☐ PMG	☐ Trailer mounted	☐ Build-in/External ATS
☐ Battery isolator	☐ STAMFORD alternator		☐ Synchronizing System
	☐ LEROY SOMER alternator		☐ Power output sockets

■ Warranty Period

KUBOTA diesel engine: Global warranty, 12 months or 1000 working hours.

STAMFORD/LEROY SOMER alternator: Global warranty, 12 months or 1000 working hours.

GENLITEMC alternator: Factory warranty, 12 months or 1000 working hours.

DEEPSEA control module: Factory warranty, 12 months or 1000 working hours.

■ Control Panel

Configuration
● Emergency stop button
● Protection MCB (Main circuit breaker)
● Float battery charger
● ATS connection
● AMF digital control module
● Fuel level meter
● Controller power switch
● Alarm buzzer

Features
● Chinese, English, Spanish, Turkish, Russian & French
● Single/Three phase generator monitoring
● Automatic or manual start/stop of the gensets
● Push buttons for simple control & operation
● Generator measurements (50Hz/60Hz)
● Precision collect & display parameters about ENGINE
● Comprehensive shutdown or warning on fault condition
● Three phase generator protections
- Over / under voltage
- Over / under frequency
- Current / voltage asymmetry
- Over current / overload
● Single/Three phase AMF function
- Over / under voltage
- Loss of phase detection function
● Emergency start function
● IP55 waterproof with rubber-ring gasket



Control Module Model: SMARTGEN HGM420N	
Display	LCD (132 x 64mm)
Operation panel	Silicon rubber
Digital input	4
Relay output	6
Analogue input	4
AMF	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator voltage	15-360V (ph-N)
Alternator frequency	50/60Hz
KW/Amp Detecting & Display	Yes
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-25 ~ +70℃

■ Controller Module Options

SMARTGEN	DEIF	DEESEA
HGM6120N	SGC 420	DSE7320
		



GENLITEC POWER TECHNOLOGY CO., LTD.
 GENLITEC (FUZHOU) POWER EQUIPMET CO., LTD.
 marketing@genlitech.com | www.genlitechpower.com

All information in the document is substantially correct at the time of printing
 But may be subsequently altered by the company.

Local Distributor / Partner