



■ Generator Specification

| Service          | PRP(1)   | ESP(2) |
|------------------|----------|--------|
| Power (KVA)      | 7.0      | 7.5    |
| Power (KW)       | 5.6      | 6      |
| Rated speed      | 1500RPM  |        |
| Standard voltage | 230/400V |        |
| Power factor     | 0.8      |        |
| Phase            | Three    |        |



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 006/42/EC Machinery directive
- 2014/30/EU Electromagnetic compatibility directive
- EN 12100:2010; EN ISO 8528-13:2016; EN 60204-1:2018; EN 61000-6-2:2019; EN 61000-6-4:2019
- **GPK7S5 (Canopied Type)**
- **GPK7D5 (Open Type)**

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)

According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set can deliver for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.


| Voltage (V) | ESP |     | PRP |     | Current Amps |
|-------------|-----|-----|-----|-----|--------------|
|             | KVA | KW  | KVA | KW  |              |
| 240/415     | 7.5 | 6.0 | 7.0 | 5.6 | 9.7          |
| 230/400     | 7.5 | 6.0 | 7.0 | 5.6 | 10.1         |
| 220/380     | 7.5 | 6.0 | 7.0 | 5.6 | 10.6         |

| Performance Data       |                | Model                 | GPK7S5   GPK7D5  |
|------------------------|----------------|-----------------------|------------------|
|                        |                | Engine brand          | KUBOTA           |
|                        |                | Engine model          | D905-E2BG        |
|                        |                | Speed control type    | Mechanical       |
|                        |                | Alternator brand      | GENLITEC         |
|                        |                | Alternator model      | S164G6.5         |
|                        |                | Control system        | SMARTGEN HGM420N |
|                        |                | Starter motor voltage | 12V              |
|                        |                | Frequency             | 50Hz             |
|                        |                | 100% Prime Load       | 2.1              |
| Fuel Consumption (L/H) | 75% Prime Load | -                     |                  |
|                        | 50% Prime Load | -                     |                  |
|                        | 25% Prime Load | -                     |                  |
|                        |                | Fuel Tank (L)         | 50               |

Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

Dimension & Weight

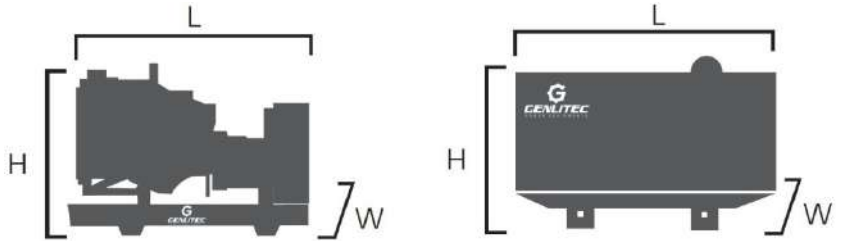

| Dimension  | Open type | Silent type |
|------------|-----------|-------------|
| Length (L) | 1450mm    | 1750mm      |
| Width (W)  | 720mm     | 800mm       |
| Height (H) | 900mm     | 1000mm      |
| Net Weight | 400kg     | 500kg       |

Note: This parameter allows for some acceptable deviations.

■ Engine Specification



| MODEL: KUBOTA D905-E2BG     |              |
|-----------------------------|--------------|
| Cylinder number             | 3            |
| Aspiration system           | Natural      |
| Cooling method              | Water cooled |
| Governor type               | Mechanical   |
| Bore x Stroke (mm)          | 72 x 73.6    |
| Compression ratio           | 23:1         |
| Rated speed (RPM)           | 1500         |
| Displacement (L)            | 0.898        |
| Rated power (KW)            | 6.6          |
| Standby power (KW)          | 7.4          |
| Injection pump              | Bosch Type   |
| Combustion system           | E-TVCS       |
| Oil capacity (L)            | 5.1          |
| Charger alternator capacity | 12V, 0.9KW   |
| Starter motor capacity      | DC 12V       |

■ Alternator Specification



| MODEL: GENLITEC S164G6.5 |                     |
|--------------------------|---------------------|
| Number of phase          | Three               |
| Rated power (KW/KVA)     | 6.5/8.1             |
| Frequency (Hz)           | 50                  |
| Power factor (Cos Phi)   | 0.8                 |
| Poles                    | 4                   |
| Temp. rise               | 125K                |
| Terminals                | 6/12                |
| Insulation type          | H class             |
| Ambient temp.            | 40°C                |
| IP rating                | IP23                |
| Excitation system        | Self-excited        |
| Bearing                  | Single bearing      |
| Coating                  | Vacuum impregnation |
| Voltage regulator        | A.V.R               |
| Coupling                 | Flexible disc       |

Standard Supply Scope

- Industrial exhaust silencer
  - Maintenance free battery
  - Water cooling radiator
  - A.V.R
- Flexible pipes
  - Battery wires
  - Wiring diagram
  - Build-in based fuel tank
- Float Battery charger
  - Manual books
  - Tool kits
  - Emergency stop button
- Base frame
  - Digital control panel
  - Main circuit breaker

■ Optional Supply Scope

| Engine                                                                                                                                  | Alternator                                                                                                                                           | Generator Sets                                                                                            | Control Panel                                                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Water jacket pre-heater</li> <li>Lubrication oil pre-heater</li> <li>Battery isolator</li> </ul> | <ul style="list-style-type: none"> <li>Anti-condensation heater</li> <li>PMG</li> <li>STAMFORD alternator</li> <li>LEROY SOMER alternator</li> </ul> | <ul style="list-style-type: none"> <li>Extended fuel tank 12h/24h/72h</li> <li>Trailer mounted</li> </ul> | <ul style="list-style-type: none"> <li>Remote control system</li> <li>Build-in/External ATS</li> <li>Synchronizing System</li> <li>Power output sockets</li> </ul> |

■ Warranty Period

**KUBOTA diesel engine:** Global warranty, 12 months or 1000 working hours.

**STAMFORD/LEROY SOMER alternator:** Global warranty, 12 months or 1000 working hours.

**GENLITEC alternator:** Factory warranty, 12 months or 1000 working hours.

**DEEPSEA control module:** Factory warranty, 12 months or 1000 working hours.

■ Control Panel

| Configuration                           |
|-----------------------------------------|
| ● Emergency stop button                 |
| ● Protection MCB (Main circuit breaker) |
| ● Float battery charger                 |
| ● ATS connection                        |
| ● AMF digital control module            |
| ● Fuel level meter                      |
| ● Controller power switch               |
| ● Alarm buzzer                          |

| Features                                                                                                                                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ● Chinese, English, Spanish, Turkish, Russian & French                                                                                                                                                                   |
| ● Single/Three phase generator monitoring                                                                                                                                                                                |
| ● Automatic or manual start/stop of the gensets                                                                                                                                                                          |
| ● Push buttons for simple control & operation                                                                                                                                                                            |
| ● Generator measurements (50Hz/60Hz)                                                                                                                                                                                     |
| ● Precision collect & display parameters about ENGINE                                                                                                                                                                    |
| ● Comprehensive shutdown or warning on fault condition                                                                                                                                                                   |
| ● Three phase generator protections <ul style="list-style-type: none"> <li>- Over / under voltage</li> <li>- Over / under frequency</li> <li>- Current / voltage asymmetry</li> <li>- Over current / overload</li> </ul> |
| ● Single/Three phase AMF function <ul style="list-style-type: none"> <li>- Over / under voltage</li> <li>- Loss of phase detection function</li> </ul>                                                                   |
| ● Emergency start function                                                                                                                                                                                               |
| ● IP55 waterproof with rubber-ring gasket                                                                                                                                                                                |



| Control Module Model: SMARTGEN HGM420N |                           |
|----------------------------------------|---------------------------|
| Display                                | LCD (132 x 64mm)          |
| Operation panel                        | Silicon rubber            |
| Digital input                          | 4                         |
| Relay output                           | 6                         |
| Analogue input                         | 4                         |
| AMF                                    | Yes                       |
| AC System                              | 1P2W / 2P3W / 3P3W / 3P4W |
| Alternator voltage                     | 15-360V (ph-N)            |
| Alternator frequency                   | 50/60Hz                   |
| KW/Amp Detecting & Display             | Yes                       |
| Monitor interface                      | USB                       |
| Programmable interface                 | USB                       |
| DC supply                              | DC 8-35V                  |
| Operating temp.                        | -25 ~ +70℃                |

■ Controller Module Options

| SMARTGEN                                                                            | DEIF                                                                                 | DEESEA                                                                                |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| HGM6120N                                                                            | SGC 420                                                                              | DSE7320                                                                               |
|  |  |  |



GENLITEC POWER TECHNOLOGY CO., LTD.  
 GENLITEC (FUZHOU) POWER EQUIPMET CO., LTD.  
 marketing@genlitech.com | www.genlitechpower.com

Local Distributor / Partner

All information in the document is substantially correct at the time of printing  
 But may be subsequently altered by the company.