


■ Model: GPC500D5-II | GPC500S5-II

Powered by CUMMINS

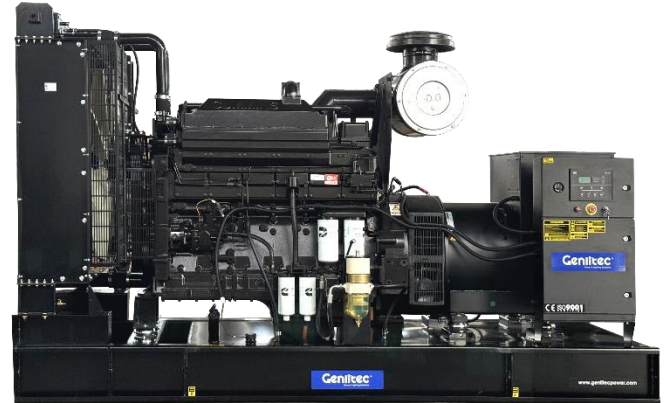

■ Generator Specification

Service	PRP(1)	ESP(2)
Power (KVA)	500	550
Power (KW)	400	440
Rated speed	1500RPM	
Standard voltage	400/230V	
Power factor	0.8	
Phase	3	

Performance Data

Model		GPC500D5 GPC500S5
Engine brand	CUMMINS	
Engine model	KTA19-G3A	
Speed control type	Electronic	
Alternator brand	STAMFORD	
Alternator model	HCI544C	
Control system	DEIF SGC420 MKII	
Starter motor voltage	24V	
Frequency	50Hz	
Fuel Consumption (kg/H)	100% Prime Load	91
	75% Prime Load	70
	50% Prime Load	48
	25% Prime Load	26



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1:2008, EN 12601: 2010
- **GPC500D5-II: OPEN TYPE; GPC500S5-II: SILENT TYPE**

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)


According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage (V)	ESP		PRP		Current Amps
	KVA	KW	KVA	KW	
415/240	550	440	500	400	696
400/230	550	440	500	400	722
380/220	550	440	500	400	760

Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

Dimension & Weight

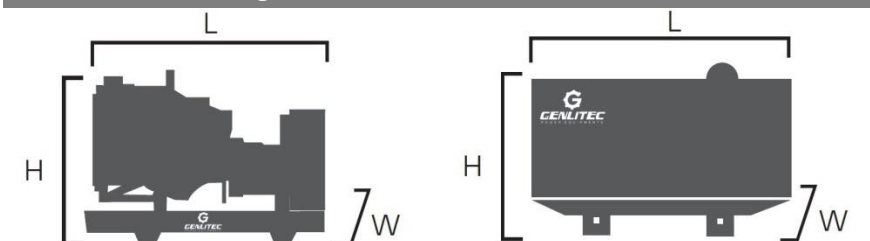

Dimension	Open type	Silent type
Length (L)	3250mm	4800mm
Width (W)	1300mm	1600mm
Height (H)	2100mm	2250mm
Net Weight	4000kg	5800kg

Note: This parameters allows for some acceptable deviations.

■ Engine Specification



MODEL: CUMMINS KTA19-G3A

Cylinder number	6
Aspiration system	Turbo, aftercooled
Cooling method	Water cooled
Governor type	Electronic
Bore x Stroke (mm)	15959
Compression ratio	13.9:1
Rated speed (RPM)	1500
Displacement (L)	19
Rated power (KW)	448
Standby power (KW)	504
Air cleaner type	Dry
Coolant capacity (L)	30.3 (engine only)
Oil pan capacity (L)	37.9
Fuel system	CUMMINS PT
Starter motor capacity	DC 24V

■ Alternator Specification



MODEL: STAMFORD HCI544C

Number of phase	3
Rated power (KW/KVA)	400/500
Frequency (Hz)	50
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	12
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

Standard Supply Scope

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator
- A.V.R
- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Float Battery charger
- Manual books
- Tool kits
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker

■ Optional Supply Scope

Engine	Alternator	Generator Sets	Control Panel
<ul style="list-style-type: none"> ○ Water jacket pre-heater ○ Lubrication oil pre-heater ○ Battery isolator 	<ul style="list-style-type: none"> ○ Anti-condensation heater ○ PMG ○ LEROY SOMER alternator ○ GENLITEC alternator 	<ul style="list-style-type: none"> ○ Extended fuel tank 12h/24h/72h ○ Soundproof canopy ○ Trailer mounted ○ 20GP containerized canopy 	<ul style="list-style-type: none"> ○ Remote control system ○ Build-in/External ATS ○ Synchronizing System ○ Power output sockets

■ Warranty Period

- 1 year or 1000 working hours, whichever comes first.
- GENLITEC company will be limited with the supply of spare parts that are examined as manufacturing defects.
- CUMMINS engine and STAMFORD alternator will be subject to warranty policies from their companies. (**GLOBAL WARRANTY**)

Control Panel

Configuration

- Emergency stop button
- Protection MCB (Main circuit breaker)
- Float battery charger
- ATS connection
- AMF digital control module
- Fuel level meter
- Controller power switch
- Alarm buzzer



Features

- Chinese, English, Spanish, Turkish, Russian & French
- Three phase generator monitoring
- Automatic or manual start/stop of the gensets
- Push buttons for simple control & operation
- Generator measurements (50Hz/60Hz)
- Precision collect & display parameters about ENGINE
- Comprehensive shutdown or warning on fault condition
- Three phase generator protections
 - Over / under voltage
 - Over / under frequency
 - Current / voltage asymmetry
 - Over current / overload
- Three phase AMF function
 - Over / under voltage
 - Loss of phase detection function
- Emergency start function
- IP55 waterproof with rubber-ring gasket

Control Module Model: DEIF SGC420 MKII

Display	LED
Operation panel	Silicon rubber
Digital input	5
Relay output	6
Analogue input	3
AMF	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator voltage	15-360V (ph-N)
Alternator frequency	50/60Hz
KW/Amp Detecting & Display	Yes
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-25 ~ +70°C

Controller Module Options

SMARTGEN

HGM6120N



COMAP

AMF25



DEEPSEA

DSE6020

