GPP225S5 | GPP225D5

Powered by Perkins

Genlitec® Power & Lighting Solutions





■ Generator Specification

Service	PRP(1)	ESP(2)
Power (KVA)	225	250
Power (KW)	180	200
Rated speed	1500RPM	
Standard voltage	220/380V	
Power factor	0.8	
Phase	3	

Performance Data		
Model	GPP225S5 | GPP225D5	
Engine brand	**PERKINS**	
Engine model	1206A-E70TTAG2	
Speed control type	Electronic	
Alternator brand	**GENLITEC**	
Alternator model	S274G180	
Control system	**DEEPSEA** DSE6120 MKII	
Starter motor voltage	12V	
Frequency	50Hz	
Fuel Cons.	100% Prime Load	51.0 L/hrs
	75% Prime Load	38.0 L/hrs
	50% Prime Load	25.5 L/hrs
	Fuel tank volume	340 Liters

ISO CE

GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1:2008, EN 12601: 2010
- **GPP225S5: Silent Type**
- **GPP225D5: Open Type**

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)


According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.


Voltage (V)	ESP		PRP		Current
	KVA	KW	KVA	KW	Amps
220/380	250	200	225	180	341.9
230/400	250	200	225	180	324.8
240/415	250	200	225	180	313.1

Standard Reference Conditions

Note: Standard reference condition 25℃ (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

Dimension & Weight

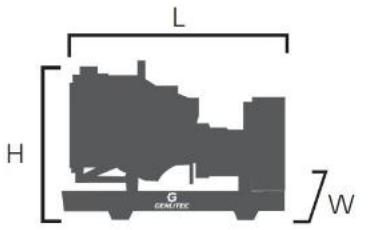

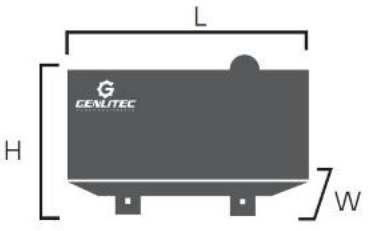

Dimension	Open type	Silent type
Length (L)	2975mm	4000mm
Width (W)	1100mm	1230mm
Height (H)	1665mm	2070mm
Net Weight	2300kg	3450kg

Note: This parameter allows for some acceptable deviations.

GENLITEC POWER has the right to modify any feature without prior notice, Weights and dimensions based on standard products. Illustrations may include optional equipment. Technical data described in this document correspond to the available information at the moment of printing. The illustrations and images are indicative and may not coincide in their entirety with the product.

GPP225S5 | GPP225D5

Powered by Perkins

Genlitec® Power & Lighting Solutions

■ Engine Specification



MODEL: PERKINS 1206A-E70TTAG2	
Cylinder number	6
Aspiration system	Turbocharged aftercooled
Cooling method	Liquid cooled
Governor type	Electronic
Bore x Stroke (mm)	105 x 135
Compression ratio	15.8:1
Rated speed (RPM)	1500
Displacement (L)	7.01
Rated power (KW)	204.2
Standby power (KW)	226.1
Oil consumption (g/kw.h)	/
Coolant capacity (L)	25
Oil capacity (L)	16
Combustion system	Direct injection
Starter motor capacity	DC 12V

■ Alternator Specification



MODEL: GENLITEC S274G180	
Number of phase	3
Rated power (KW/KVA)	180/225
Frequency (Hz)	50
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	6 (12-lead for option)
Insulation type	H class
Ambient temp.	40℃
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

Standard Supply Scope

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator
- A.V.R
- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Float Battery charger
- Manual books
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker

■ Optional Supply Scope

Engine	Alternator	Generator Sets	Control Panel
○ Water jacket pre-heater	○ Anti-condensation heater	○ Extended fuel tank 12h/24h	○ Remote control system
○ Lubrication oil pre-heater	○ PMG	○ Trailer mounted	○ ATS panel
○ Battery isolator	○ AREP	○ Galvanized steel enclosure	○ Power output sockets
	○ **STAMFORD** alternator		
	○ **LEROY SOMER** alternator		

Genlitec® Power & Lighting Solutions

GPP225S5 | GPP225D5

Powered by Perkins

Genlitec® Power & Lighting Solutions

■ Control Panel

Configuration
● Emergency stop button
● Protection MCB (Main circuit breaker)
● Float battery charger
● ATS connection
● AMF digital control module
● Fuel level meter
● Controller power switch
● Alarm buzzer



Features
● Multiple display languages
● Automatic transfer between mains and generator power
● 3-phase mains and generator voltage monitoring
● Generator current monitoring and protection
● Event log for 10 events and engine-hours counter
● 6 digital inputs and 3 analog sender inputs
● Six outputs; configuration depends on the engine version
● Three phase generator protections
- Over / under voltage
- Over / under frequency
- Current / voltage asymmetry
- Over current / overload
● Three phase AMF function
- Over / under voltage
- Loss of phase detection function
● Emergency start function
● IP65 rating with rubber-ring gasket

Control Module Model: DEEPSEA DSE6120 MKII	
Display	Large back-lit text display
Generator & Mains (Utility) Voltage Range	15 V to 415 V AC (Ph to N) 26 V to 719 V AC (Ph to Ph)
Frequency range	3.5 Hz to 75 Hz
Analogue inputs A to F	Negative switching
AMF function	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator frequency	50/60Hz
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-30 ~ +70℃

Control Module Certified

■ Controller Module Options

COMAP	SMARTGEN	DEEPSEA
AMF25	**HGM6120N**	**DSE7320 MKII**
		

Genlitec® Power & Lighting Solutions

GENLITEC POWER TECHNOLOGY CO., LTD.
GENLITEC (FUZHOU) POWER EQUIPMET CO., LTD.
marketing@genlitec.com | www.genlitecpower.com

All information in the document is substantially correct at the time of printing.
But may be subsequently altered by the company.

Local Distributor / Partner