

■ Model: **GLT4000-9MK**

Powered by KUBOTA D1105-BG



■ Generator Specification

| Service | PRP(1) | ESP(2) |
|-------------------|------------------|--------|
| Genset power (KW) | 6.7 | 7.3 |
| Voltage | 220V; 230V; 240V | |
| Frequency | 50/60Hz | |
| Engine speed | 1500/1800R.P.M | |
| Power factor | 1.0 | |
| Phase | Single | |

| Performance Data | |
|------------------------------|----------------------------|
| Model | GLT4000-9MK |
| Engine brand | KUBOTA |
| Engine model | D1105-BG |
| Speed control type | Mechanical |
| Alternator brand | STAMFORD GENLITEC |
| Alternator model | PI 044E S164G8 |
| Control system | SMARTGEN HGM1790N |
| Starter motor voltage | 12V |
| Max. height of mast | 9 meters |
| Mast lifting/lowering system | Mechanical |
| Total power of lamps | 4x1000 watts |
| Fuel consumption (100% load) | 2.0L/H |
| Fuel tank capacity | 100L |



GENLITEC Power lighting towers & generator sets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1:2008, EN 12601: 2010

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)

According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Container Loading Capacity

8 SETS / 20GP


16 SETS / 40GP



Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

Dimension & Weight

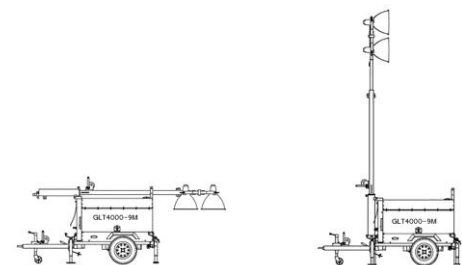

| Dimension | Storage | Working |
|------------|---------|---------|
| Length (L) | 4250mm | 2600mm |
| Width (W) | 1450mm | 2350mm |
| Height (H) | 1700mm | 9000mm |
| Net Weight | 870kg | |

Note: This parameter allows for some acceptable deviations.

■ Engine Specification



MODEL: KUBOTA D1105-BG

| | |
|-----------------------------|------------------------|
| Cylinder number | 3 |
| Aspiration system | Natural |
| Cooling method | Water cooled |
| Combustion system | E-TVCS |
| Bore x Stroke (mm) | 78.0x78.4 |
| Compression ratio | 22:1 |
| Rated speed (RPM) | 1500 |
| Displacement (L) | 1.123 |
| Rated power (KW) | 8.4 |
| Standby power (KW) | 9.5 |
| Fuel injection pump | Bosch type PFR MD pump |
| Injection Nozzle | Throttle type |
| Oil capacity (L) | 5.1 |
| Charger Alternator capacity | 12V – 30A |
| Starter motor capacity | DC 12V – 1.0A |

■ Operation Mast Specification

| | |
|------------------------------|--------------------------|
| Max. height of mast | 9m |
| Elevation system | Mechanical |
| Raising/Lowering mast method | 2 x 1800LBS Manual winch |
| Mast stages | 3 |
| Turning angle | 358° manually |
| Mast material | Steel tube |

■ Chassis Specification

| | |
|--------------------|-----------------------|
| Hitch type | Ring/Ball tow hitch |
| Brake type | Mechanical hand brake |
| Trailer structure | Single axle |
| Tyre size | 13 inch |
| Leveling jack type | Manual |

■ Alternator Specification



MODEL: STAMFORD PI 044E | GENLITEC S164G8

| | |
|------------------------|---------------------|
| Number of phase | Single |
| Rated power (KW) | 8 |
| Frequency (Hz) | 50/60 |
| Power factor (Cos Phi) | 1 |
| Temp. rise | 125K |
| Insulation type | H class |
| Ambient temp. | 40°C |
| IP rating | IP23 |
| Excitation system | Self-excited |
| Bearing | Single bearing |
| Coating | Vacuum impregnation |
| Voltage regulator | A.V.R |
| Coupling | Flexible disc |


■ Lamps Specification

| | |
|----------------------|--------------------|
| Total power of lamps | 4 x 1000 watts |
| Lamps type | Metal halide lamps |
| Light capacity | 4 x 110,000 lumen |
| Design lifetime | 5000 hours |
| Working temperature | ≤85°C |
| Light coverage | 5 ~ 7 acres |

■ Controller Panel Specification

| | |
|----------------------|----------------------|
| Control module | SMARTGEN HGM1790N |
| Main & Lamps Breaker | DELIXI |
| Emergency stop | Equipped |
| Starting method | Electric (Key start) |
| Output Socket | 2 x Single phase |

■ Lighting Area

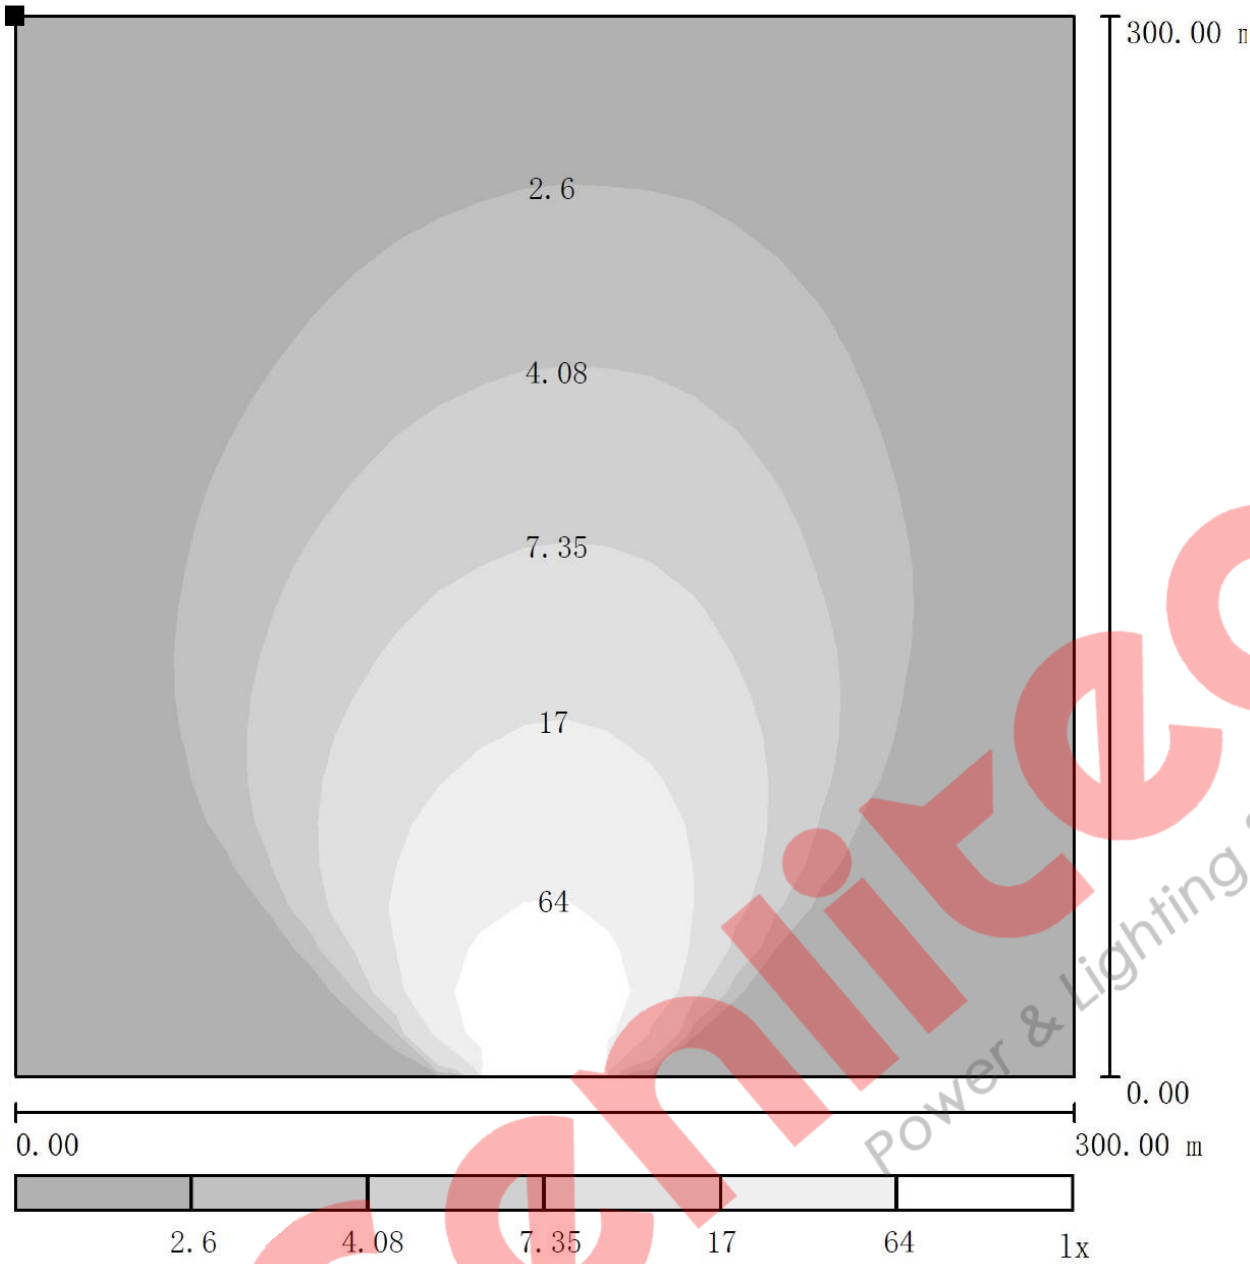

■ Standard Supply Scope

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator
- A.V.R
- Weather proof canopy
- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Top caution light
- Float Battery charger
- Manual books
- Tool kits
- Emergency stop button
- Ball/Ring hitch with save chain
- Base frame
- Digital control panel
- Main circuit breaker
- Power output socket x 1

■ Optional Supply Scope

| Engine | Alternator | Control Panel | Lamps |
|---|---|--|---|
| <input type="checkbox"/> QUANCHAI CZ380D engine <input type="checkbox"/> KUBOTA D1105-BG engine <input type="checkbox"/> Water jacket pre-heater <input type="checkbox"/> Battery isolator | <input type="checkbox"/> STAMFORD alternator <input type="checkbox"/> MECC ALTE alternator | <input type="checkbox"/> Smartgen ALC controller Sunrise & sunset start/stop Remote start/stop <input type="checkbox"/> ABB breakers | <input type="checkbox"/> 4x1500W lamps <input type="checkbox"/> Spotlights <input type="checkbox"/> 4x350W LED Spotlights |

Control Panel

Configuration

- Emergency stop button
- Protection MCB + Lamps & Socket circuit breaker
- Digital control module
- Power output socket x 2 (Single Phase)
- Weather proof controller box
- Alarm buzzer



Key Features

- Large back-lit icon LCD display
- Single / Three phase generator monitoring
- AC phase voltage display
- Generator frequency display
- Engine speed RPM display
- Battery voltage Vdc display
- Generator running hours display
- Engine coolant temperature display
- Engine oil pressure display
- Pre-alarm & shutdown alarm function
- Low oil pressure shutdown alarm
- Engine high temperature shutdown alarm
- Engine over speed shutdown alarm
- Generator over/under voltage shutdown alarm
- Generator over load shutdown alarm
- Start/Stop failure shutdown alarm
- IP65 rating offers increased resistance to water ingress

Control Module: SMARTGEN HGM1790N

| | |
|-------------------------|---------------------------|
| Digital input | 5 |
| Relay output | 5 |
| Communication interface | PC |
| AMF | M/A |
| AC System | 1P2W / 2P3W / 3P3W / 3P4W |
| Phase voltage input | 0-300Vac |
| Frequency range | 3Hz – 70Hz |
| Standby current | TBA |
| Accuracy | 1% |
| Control relay outputs | 3A/30Vdc |
| DC supply | DC 8-35V |
| Operating temp. | -20 ~ +70°C |

Controller Module Options

| SMARTGEN | COMAP | DEESEA |
|---|--|---|
| ALC704 | Inteli Nano | Inteli Nano |
|  |  |  |

GENLITEC (FUZHOU) POWER EQUIP MET CO., LTD.
 GENLITEC POWER TECHNOLOGY CO., LTD.
 marketing@genlitech.com | www.genlitechpower.com

All information in the document is substantially correct at the time of printing
 But may be subsequently altered by the company.