

■ Generator Specification

Service	PRP(1)	ESP(2)
Power (KVA)	313	344
Power (KW)	250	275
Rated speed	1500RPM	
Standard voltage	400/230V	
Power factor	0.8	
Phase	3	

Performance Data		
Model	GPW313S5   GPW313D5	
Engine brand	WEICHA	
Engine model	WP10D320E200	
Speed control type	Electronic	
Alternator brand	GENLITEC	
Alternator model	S314G250	
Control system	SMARTGEN HGM6120N	
Starter motor voltage	24V	
Frequency	50Hz	
Fuel Consumption (L/H)	100% Prime Load	71
	75% Prime Load	51.7
	50% Prime Load	34.9
	25% Prime Load	/
Fuel Tank (L)		540



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery directive
- 2014/30/EU Electromagnetic compatibility directive
- EN 12100:2010; EN ISO 8528-13:2016; EN 60204-1:2018; EN 61000-6-2:2019; EN 61000-6-4:2019
- **GPW313S5 (Silent Type)**
- **GPW313D5 (Open Type)**

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)


According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set can deliver for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage (V)	ESP		PRP		Current Amps
	KVA	KW	KVA	KW	
415/240	344	275	313	250	438
400/230	344	275	313	250	455
380/220	344	275	313	250	479

Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2


Dimension & Weight

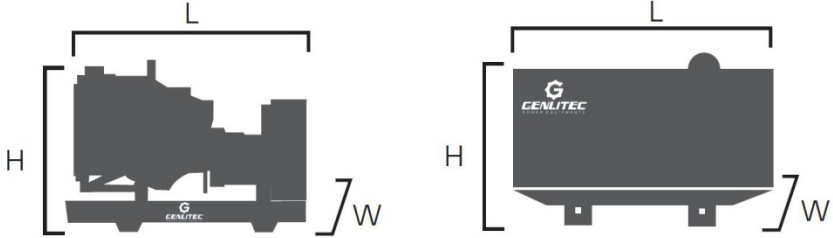

Dimension	Open type	Silent type
Length (L)	2850mm	3950mm
Width (W)	1200mm	1200mm
Height (H)	1580mm	2040mm
Net Weight	1850kg	3000kg

Note: This parameter allows for some acceptable deviations.

Engine Specification

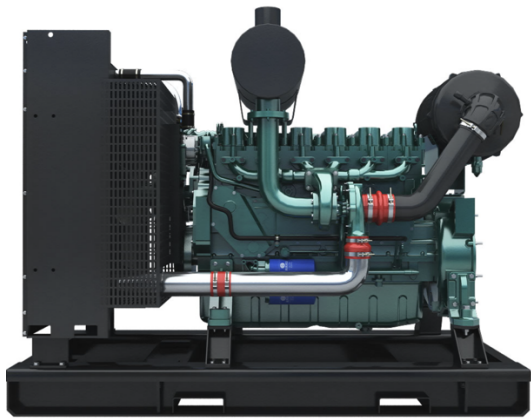

MODEL: WEICHA WP10D320E200

Cylinder number	6
Aspiration system	Turbo, aftercooled
Cooling method	Water cooled
Governor type	Electronic
Bore x Stroke (mm)	126 x130
Compression ratio	17.0:1
Rated speed (RPM)	1500
Displacement (L)	9.726
Rated power (KW)	291
Standby power (KW)	320
Injection	≤0.4
Coolant capacity (L)	22
Oil capacity (L)	30
Fuel system	Mechanical pump
Starter motor capacity	DC 24V

Alternator Specification



MODEL: GENLITEMC S314G250

Number of phase	3
Rated power (KW/KVA)	250/313
Frequency (Hz)	50
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	6/12
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

Standard Supply Scope

- |                               |                            |                         |                         |
|-------------------------------|----------------------------|-------------------------|-------------------------|
| ● Industrial exhaust silencer | ● Flexible pipes           | ● Float Battery charger | ● Base frame            |
| ● Maintenance free battery    | ● Battery wires            | ● Manual books          | ● Digital control panel |
| ● Water cooling radiator      | ● Wiring diagram           | ● Tool kits             | ● Main circuit breaker  |
| ● A.V.R                       | ● Build-in based fuel tank | ● Emergency stop button |                         |

Optional Supply Scope

Engine	Alternator	Generator Sets	Control Panel
<input type="checkbox"/> Water jacket pre-heater	<input type="checkbox"/> Anti-condensation heater	<input type="checkbox"/> Extended fuel tank 12h/24h/72h	<input type="checkbox"/> Remote control system
<input type="checkbox"/> Lubrication oil pre-heater	<input type="checkbox"/> PMG	<input type="checkbox"/> Trailer mounted	<input type="checkbox"/> Build-in/External ATS
<input type="checkbox"/> Battery isolator	<input type="checkbox"/> STAMFORD alternator		<input type="checkbox"/> Synchronizing System
	<input type="checkbox"/> LEROY SOMER alternator		<input type="checkbox"/> Power output sockets

Warranty Period

**WEICHA diesel engine:** 12 months or 1000 working hours.  
**STAMFORD/LEROY SOMER alternator:** Global warranty, 12 months or 1000 working hours.  
**GENLITEMC alternator:** Factory warranty, 12 months or 1000 working hours.  
**DEEPSEA control module:** Factory warranty, 12 months or 1000 working hours.

Control Panel

Configuration
● Emergency stop button
● Protection MCB (Main circuit breaker)
● Float battery charger
● ATS connection
● AMF digital control module
● Fuel level meter
● Controller power switch
● Alarm buzzer

Features
● Chinese, English, Spanish, Turkish, Russian & French
● Three phase generator monitoring
● Automatic or manual start/stop of the gensets
● Push buttons for simple control & operation
● Generator measurements (50Hz/60Hz)
● Precision collect & display parameters about ENGINE
● Comprehensive shutdown or warning on fault condition
● Three phase generator protections <ul style="list-style-type: none"><li>- Over / under voltage</li><li>- Over / under frequency</li><li>- Current / voltage asymmetry</li><li>- Over current / overload</li></ul>
● Three phase AMF function <ul style="list-style-type: none"><li>- Over / under voltage</li><li>- Loss of phase detection function</li></ul>
● Emergency start function
● IP55 waterproof with rubber-ring gasket



Control Module Model: SMARTGEN HGM6120N	
Display	LCD (132 x 64)
Operation panel	Silicon rubber
Digital input	5
Relay output	6
Analogue input	3
AMF	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator voltage	15-360V (ph-N)
Alternator frequency	50/60Hz
KW/Amp Detecting & Display	Yes
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-25 ~ +70℃

Controller Module Options

COMAP	DEIF	DEESEA
AMF25	SGC 420	DSE7320
		

